

SEVIER COUNTY HEALTH DEPARTMENT • DIVISION OF ENVIRONMENTAL HEALTH
PERMIT FOR CONSTRUCTION OF SUBSURFACE SEWAGE DISPOSAL SYSTEM



Issued to: 12730 NW 22 CT LLC / Young, Mark
 Owner, Developer, Contractor, Installer, Etc.
 Location: Benson Prop. # Tr. 2
Sulphur Springs Way Acreage: _____
 Installation: (☒) 1. New Installation (☐) 2. Repair to Existing System
 Establishment:
 (☒) 1. Residential: # Bedrooms Two
 (☐) 2. Other: _____ (specify) _____
 Gal./Day _____

Evaluation Based Upon:
 (☒) 1. Soil typing by Soil Scientist
 (☐) a. General
 (☒) b. High Intensity
 (☐) c. Extra High Intensity
 (☐) 2. Soil Percolation Test
 (☐) 3. Environmental Specialist
 Estimated Absorption Rate: 30 MPI

Approval based upon:
 Statute No. T.C.A. 68-221-403
 (☐) (c) Percolation test
 (☐) (d) Grandfather clause. Current standards except those specified
 (☐) (f) 12" (karst) and 6" (non-karst) buffer required
 (☐) (i) 9" buffer required (24"-36" total soil depth)
 (☐) (k) Grandfather clause - meets June 30, 1990 standards (repair only)
 (☐) Other _____
 (☒) Current Standards

Type of Disposal System	Trench Length	Trench Width	Trench Depth	Gravel Depth	Cover-Paper/Straw
☒ Conventional System	<u>170'</u>	<u>36"</u>	<u>24-36"</u>	<u>12"</u>	<u>yes</u>
☒ Large Diameter Gravelless Pipe (☐ 8" (☐ 10"	<u>170'</u>	<u>18-24"</u>	<u>"</u>	<u>"</u>	<u>"</u>
☒ Chamber 3' Wide	<u>170'</u>	<u>36"</u>	<u>"</u>	<u>"</u>	<u>"</u>
☒ Chamber 2' Wide	<u>170'</u>	<u>24"</u>	<u>"</u>	<u>"</u>	<u>"</u>
☒ EZ Flow (☐ 12" (☐ 14"	<u>170'</u>	<u>18-36"</u>	<u>"</u>	<u>"</u>	<u>"</u>
☐ Other					


Septic Tank	Size
Concrete	
Other	
Pump Chamber	
Sewage Effluent Pump	
Riser / Alarm	

The recipient of this permit agrees to construct or have constructed the above described system in accordance with T.C.A. 68-221-401 et. seq. and The Regulations To Govern Subsurface Sewage Disposal Systems. If any part of the system is covered before being inspected and approved, it shall be uncovered by the recipient of the permit at the direction of personnel of the Sevier County Division of Environmental Health. Any cutting, filling or alterations of the soil conditions on the aforementioned property after this day may render this approval null and void. All installers of subsurface sewage disposal systems must hold a valid annual license from the Sevier County, Division of Environmental Health.

Signature of Recipient: email Date: 4-7-23
 Issued at Sevierville, Tennessee, in Sevier County
 By: Brad Bowers ES. Date: 4/6/23
 (Name and Title) (Date of Issue)

- NOTES: (1) Scale 1" = 100'
 (2) Install trenches on contour of land.
 (3) Maintain a 100% Duplication Area (☒)
 (4) Keep well 50 feet or more from sewage system.
 (5) 10' from property lines.
 (6) 10' trenches from house.
 (7) 5' septic tank from house.
 (8) 15' septic tank from cut bank.
 (9) 25' from cut banks and natural drains.
 (10) Call 429-1766 8:00-8:50 a.m. for inspection.

↑ Maintain All Setbacks ↑

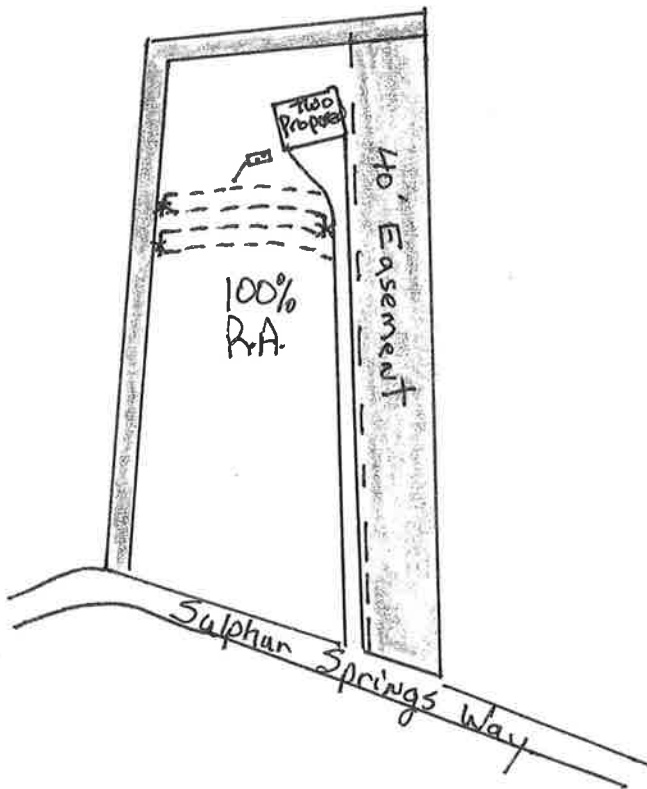

Changes to house / drive size and / or location may void permit.

CONTROL SURFACE WATER

X Crossover
 SIP
 - - - Field Line
 — Solid Line
 Original - File
 Yellow - Owner

This is a permit to construct and is not intended to imply approval of any work proposed or completed on this lot.

THIS PERMIT IS VALID FOR 3 YEARS FROM DATE OF ISSUE